



14' Enclosed Lift Specs



CAPACITY: 750 LBS

SPEED: 20 FPM (Nominal)

SAFETIES: Instantaneous type "a" slack cable w/under pan pressure plate

DOOR LOCKS: Honeywell realign electromechanical interlocks

OPERATION: Constant pressure

ELECTRICAL REQUIREMENTS:

Controller is equipped with a 120vac plug/pigtail. Requires a dedicated circuit, 120vac, 20amp outlet within sight of the lift.

CONTROL SYSTEM: Relay and Plug & Play

CODE: ASME 18.1 - 2020

MODEL: V-1504

DESCRIPTION: Solid lower

CONFIGURATION: Pass through

TOP DOOR CONFIGURATION: Lefthand swing

BOTTOM DOOR CONFIGURATION: Righthand swing

CUSTOM RAMP: Upper transition plate, ramp at bottom

MINIMUM TRAVEL: 8' 6" (102 inches)

MAXIMUM TRAVEL: 13' 10" (166 inches)


811 Edwards Road Fort Pierce, FL 34982

Phone: 772-828-3440 • Email: info@adaliftrentals.com


ADALIFTRENTALS.COM



14' Enclosed Lift Specs

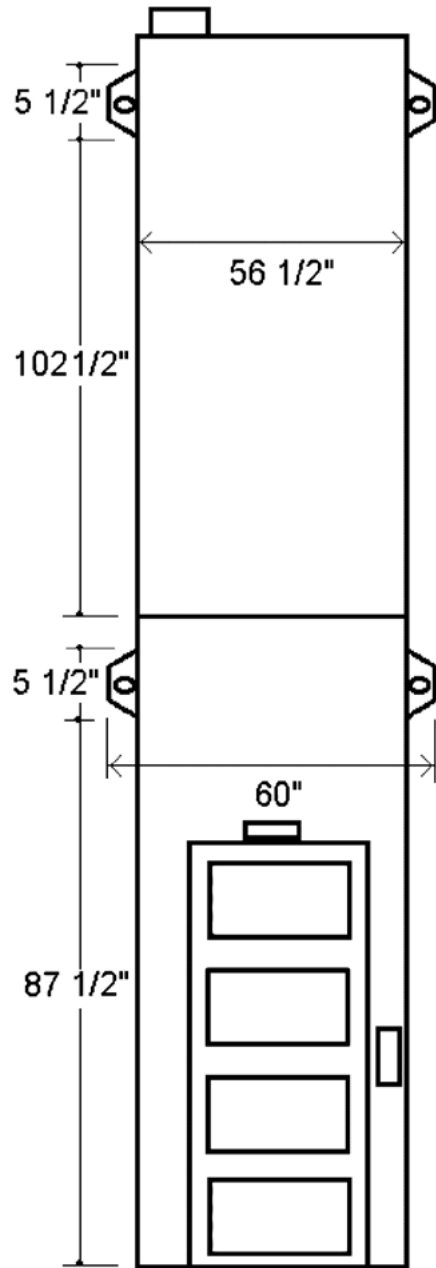

FRONT VIEW

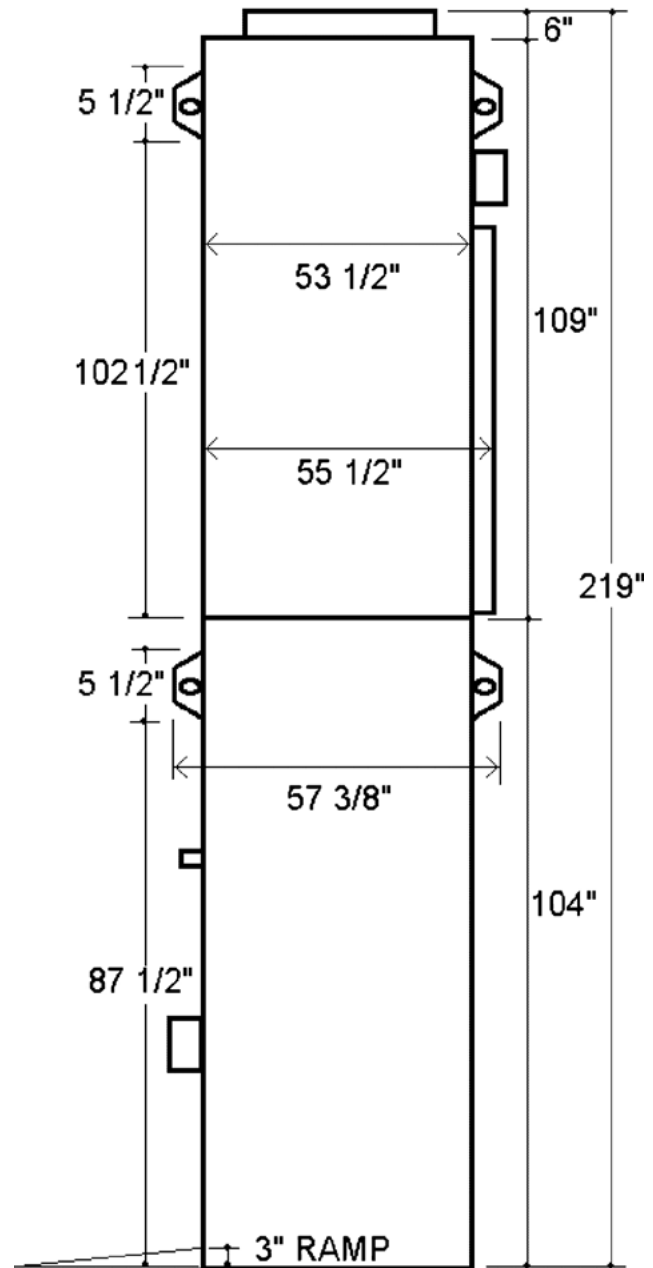


SIDE VIEW

811 Edwards Road Fort Pierce, FL 34982
Phone: 772-828-3440 • Email: info@adaliftrentals.com

ADALIFTRENTALS.COM



14' Enclosed Lift Specs

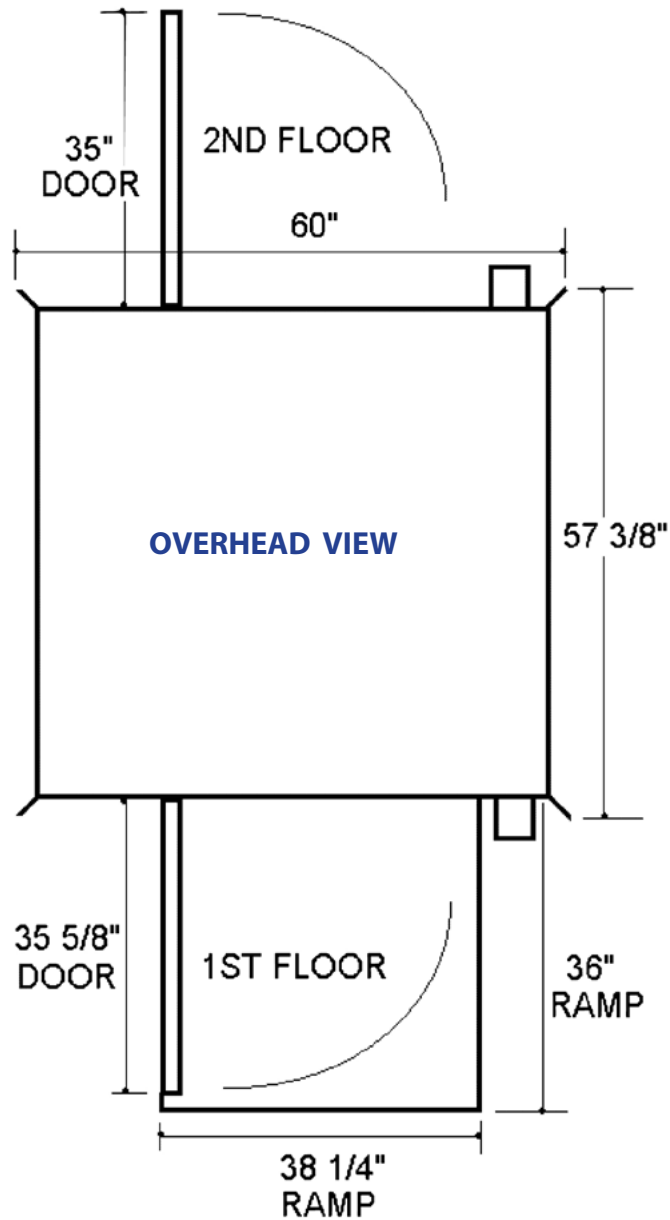

PROPRIETARY AND CONFIDENTIAL

The information contained in this document is the sole property of ADA Lift Rentals of America, LLC. Any reproduction in part or as a whole without the written permission of ADA Lift Rentals of America is prohibited.

811 Edwards Road Fort Pierce, FL 34982
Phone: 772-828-3440 • Email: info@adaliftrentals.com

ADALIFTRENTALS.COM